



AGRICULTURAL PTO MODEL 2015



*Since
1929*

*Durable to Last Generations,
Innovative to Meet Your Diverse Grinding Needs*



402-528-3861



mightygiant@mightygiant.com



www.mightygiant.com




AGRICULTURAL PTO MODEL 2015

Model 2015	
Horsepower	Up to 450 HP
Suspension Capacity	20,000 Lbs.
Pin-Hitch Chassis	Tandem Axle
Mill	26"x 48" with 5" Shaft
Mill Bearing Size	3-15/16" Pillow Block
Hammer	3/8" or 1/2" Thick
Number of Hammers	84
Tub Size (Interior)	9' Interior
Elevator	24" Wide x 25' Hydraulic Folding with 1-1/2" Cleated Belt
Discharge Auger	14" Right Hand Auger
Dimensions	Length: 22' 5"
	Width: 11' 4"
	Height: 12'
Weight	Approximately 18,000 Lbs.

The Mighty Giant model 2015 is a heavy duty, PTO driven tub grinder built for the agricultural industry. It features a variable speed, hydraulically and electronically driven tub and a hydraulically driven swinging, stacking, conveyor. Both the tub and elevator are run by remote control for operator convenience.

The Mighty Giant free swinging hammer mill is used for higher production rates and better finished product. A standard 14" discharge auger under the mill feeds the top-driven conveyor, allowing trouble free operation and less mess under the grinder.

Standard on every Mighty Giant - from the PTO model to the Hydrfork - is the hydraulic opening tub for easy access to the mill, hammers, and screens.

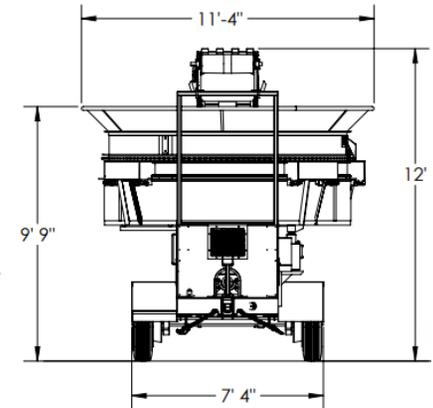

FEATURES

- Tub opens hydraulically for servicing and changing screens
- Tub operation is controlled by a Plus One governor w/remote
- Tub is hydraulically chain-driven with variable speed and reverse
- Elevator drives from the top with rubber lagged pulley
- Hydraulically raise, lower and swinging side to side discharge elevator
- Trouble-free 14" high-capacity discharge auger
- Capable of grinding any type of forage or grain
- Highest capacity, most durable PTO grinder available
- Multi-functional remote control to run the tub speed, forward and reverse. It also controls the raising, lowering and swing of the elevator.

