# POWER UNIT
# MODEL 4012




You get more than 70 years of hands-on, in-the-field experience in every Mighty Giant we build.

***Durable to Last Generations,***
***Innovative to Meet Your Diverse Grinding Needs***

402-528-3861 migthygiant@mightygiant.com www.mightygiant.com


# POWER UNIT
# MODEL 4012


| | Model 4012 |
|---|---|
| Engine Options | CAT or John Deere Engine w/ extended warranty |
| Horsepower | Up to 800 HP |
| Fan | Optional Reversing Fan |
| Clutch | Twin Disc SP318 or Fluid Coupling |
| Hammer | 3/8", 1/2" or 3/4" thick |
| Number of Hammers | Up to 96 |
| Mill | "26 x 48", 28" x 50", 28" x 56" |
| Mill Bearing Size | 3 15/16" Pillow Block |
| Mill Hammer Pins | 6 Pins - 1 1/4" Diameter |
| Tub Size | 9' or 10' Interior |
| Tub Drive | Single or Dual Drive Hydraulic Motor Drive w/ No. 2100 Heavy Duty, Self Adjusting Chain |
| Elevator Dimensions | 24" x 27' Hydraulic Rigid w/ swing |
| Elevator Drive | Top Drive via Hydraulic Motor |
| Discharge Auger | 14" Right Hand Auger |
| Dimensions | Length: 35' 3 "- 37' 6"<br>Width: 11' 4" - 12' 2"<br>Height: 11' 10" - 13' |
| Weight | Approximately 38,000 pounds |

The Mighty Giant Model 4012 is a heavy duty, commercial grinder designed for the Agricultural and Wood Industries. It features a variable speed tub with a Plus One Controller. All tub and elevator functions are remote controlled. A 27' long, swinging, stacking conveyor for loading trucks, commodity buildings and piles.

The Mighty Giant comes equipped with a CAT or John Deere engine, featuring extended engine warranty coverage.

Standard on every Mighty Giant - from the PTO Model to the Hydrafork - is the hydraulic opening tub for easy access to the mill, hammers and screens - eliminating the need to climb in and out of the tub.

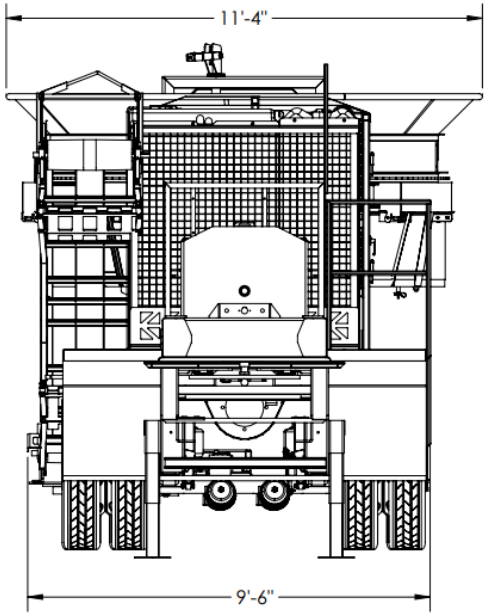

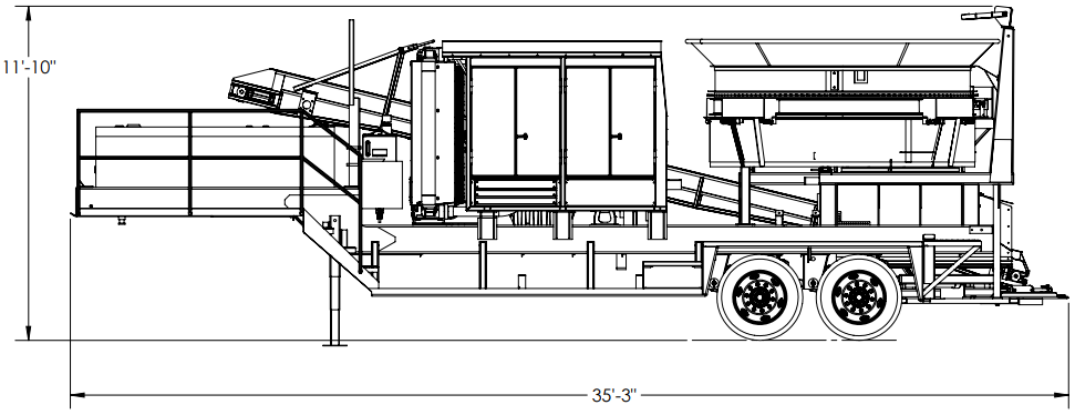
## FEATURES

- 25K Air Ride Tandem axle, dual wheel chassis with Tube Frame
- Tub opens hydraulically for servicing and changing screens
- Tub Operation is controlled by a Plus 1 Governor w/ Remote
- Tub is hydraulically chain-driven with variable speed and reverse
- Elevator drives from the top with rubber lagged pulley
- Hydraulically raise & lower discharge elevator
- Trouble-free 14" High-capacity discharge auger
- Multi-function remote control

Manufacturer reserves the right to modify designs, materials and specifications without notice.